

A

B




C

D

E


1

1

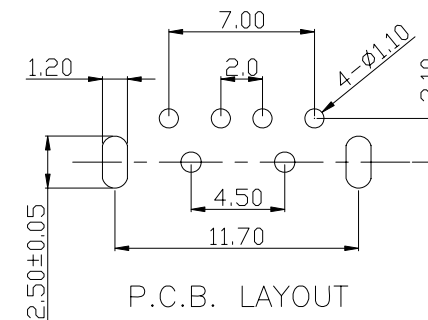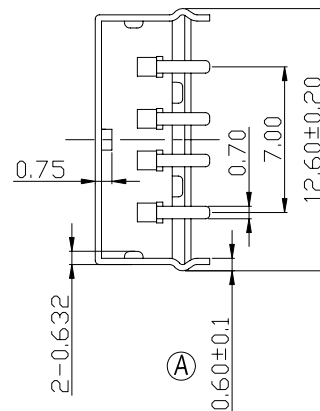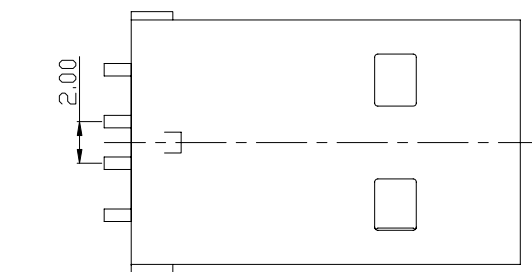

2

2

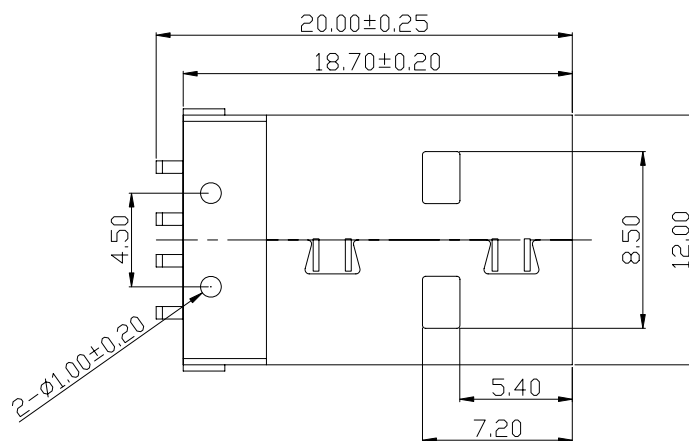

3

3

MATERIALS

HOUSING: PBT (UL 94V-0)

SHELL: SPCC, NICKEL PLATING

TERMINAL: COPPER ALLOY/C2680, GOLD PLATED ON CONTACT AREA
TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1 AMP MAX

DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE

CONTACT RESISTANCE: 30m OHMS MAX

INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V

OPERATION TEMPERATURE: -25°C ~ +80°C

PART NO	COLOR
UAM-041RGPB2-CF1066	BLACK
UAM-041RGPW2-CF1066	WHITE

DESCRIPTION(内容):

USB A TYPE, PCB MOUNT, RIGHT ANGLE
METAL SHIELD, MALE (RoHS)PART NO:
(料 號) UAM-041RGPX2-CF1066

DWG NO(圖號): 22AC-041T-21KL

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:
(公差).X ±0.3
.XX ±0.2
.XXX ±0.1

SCALE(比例):

FREE



REV:

R1

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

新增尺寸(A)

DATE

2016.08.17

2017.06.16

A

B

C

D

E