


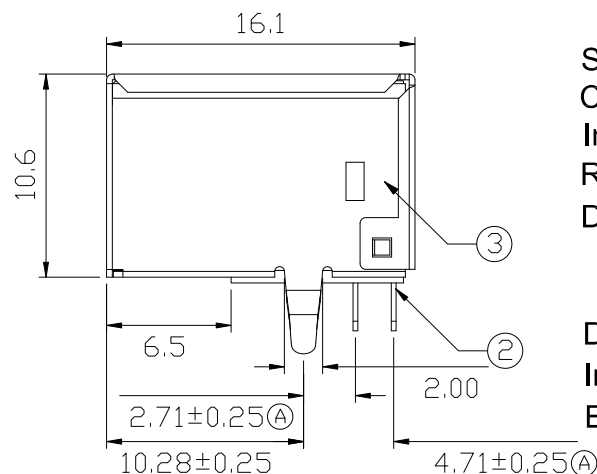


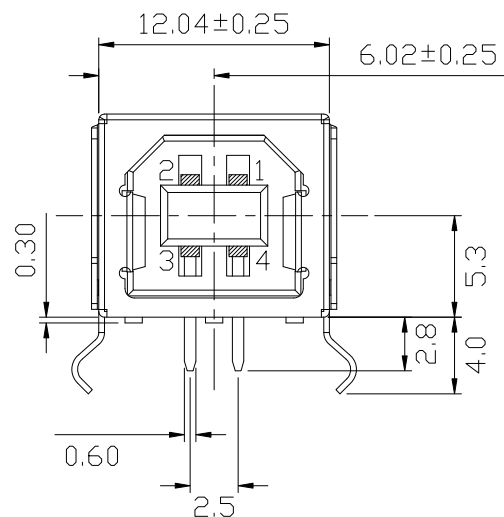

Specification:
 Contact Resistance: 30m Ohm Max.
 Insulation Resistance: 1000M Ohm Min. At 500VDC.
 Rated Voltage And Current: 1.5A At 250VAC Minimum.
 Dielectric Withstanding Voltage:
 750V AC (rms) for 1 Minute(Rev. 1.1)
 500V AC (rms) for 1 Minute(Rev. 2.0)
 Durability (Life Test): 1500 Cycles
 Insertion Force: 35 Newton Maximum.
 Extraction Force: 10 Newton Minimum.

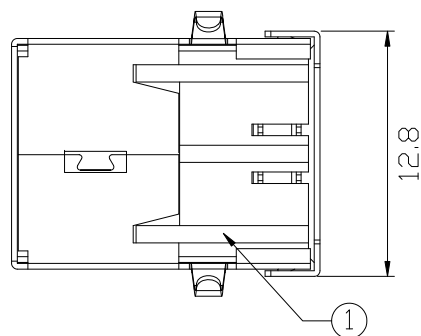

NO.	NAME	MATERIAL	FINISH	REMARK	Q'TY
1	HOUSING	PBT G.F.	WHITE BLACK	P/N:UBF-041RGPW-CF254 P/N:UBF-041RGPB-CF254	1
2	PIN TERM.	PHOS. BRONZE T:0.25	GOLD/TIN PLATED	Gold:1~3u", NI:40~60u", TIN:120u" (100% pure Tin of lead free plating)	4
3	SHELL	BRASS T:0.3	NICKEL PLATED	NI:80~120u"	1

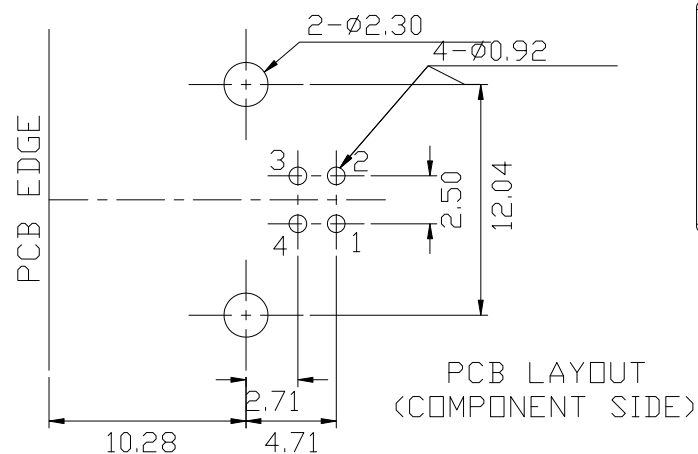

承洧科技股份有限公司
 Chereng Wee Technology Corp.

DESCRIPTION(內容):
 USB B TYPE FLAT 4 PIN DIP
 (RoHS)

PART NO:
 (料號) UBF-041RGPX-CF254

DWG NO(圖號):

DRAWN(製圖):
 GONG

CHECKED(確認):

MANDY

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:
 (公差)

.X ±0.38
 .X ±0.25
 .XX ±0.13
 .XXX ±0.05

SCALE(比例):

FREE



REV:
 R4

UNIT:
 mm

SIZE:
 A4

SHEET:
 1/1

REV

R0

R1

R2

R3

R4

DESCRIPTION

環保料
 2007年USB SERIES料號轉換
 補充公差&SPECIFICATION

補充 Black Color料號

增加(A)尺寸公差

DATE

2005.08.08

2006.09.07

2007.08.06

2007.09.06

2007.12.04

2014.09.22