





A

B

C

D

E

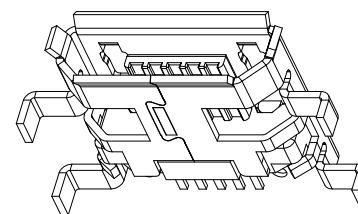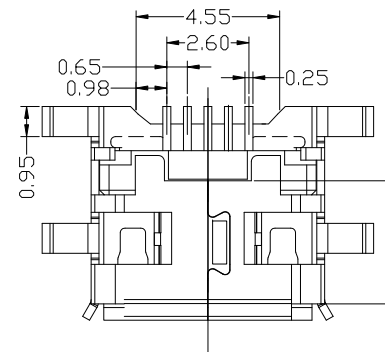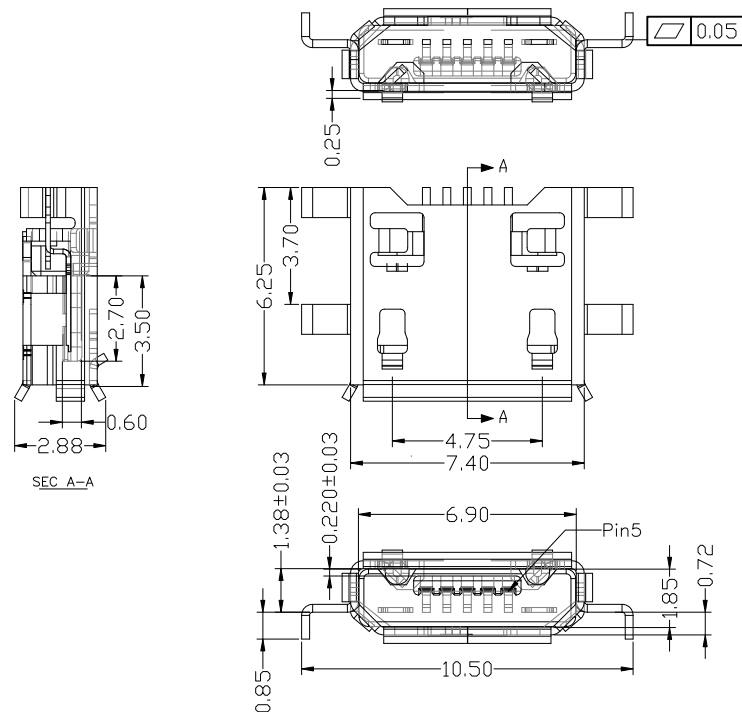

MATERIALS

HOUSING: LCP.(UL 94V-0),COLOR:BLACK

SHELL: COPPER ALLOY, TIN PLATING

TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA

TIN PLATING ON SOLDER TAIL

SPECIFICATION


CURRENT RATING: 1.8 AMP MAX (ONLY PIN 1, 5), OTHER 1 AMP MAX

DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE

CONTACT RESISTANCE: 30m OHMS MAX

INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V

OPERATION TEMPERATURE: -25°C~+105°C

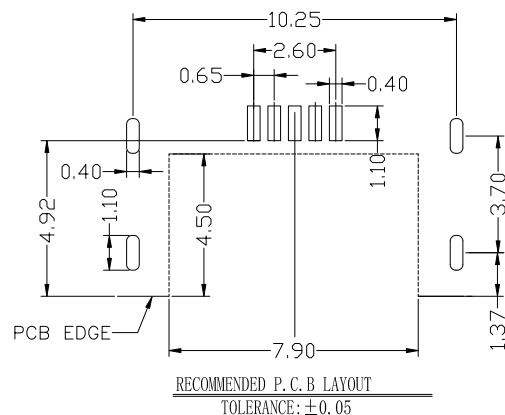

承洧科技股份有限公司
Cherng Weei Technology Corp.

DESCRIPTION(內容):

MICRO USB B TYPE, PCB MOUNT,SMT,
BOARD CUT TYPE, METAL SHIELD,FEMALE
(RoHS)

PART NO:
(料 號) UMMBF-051MGCB6-CF1066

DWG NO(圖號): 22TCH-051-126L

DRAWN(製圖):

Mandy

CHECKED(確認):

MANDY

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:

(公差)

.X ±0.30
.XX ±0.20
.XXX ±0.10
ANG. ±3°

SCALE(比例):

FREE



REV:

R1

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE

更換確認章

DATE

2013.05.30

2019.09.17

A

B

C

D

E

CF1066