

A

B





C

D

E


1

1

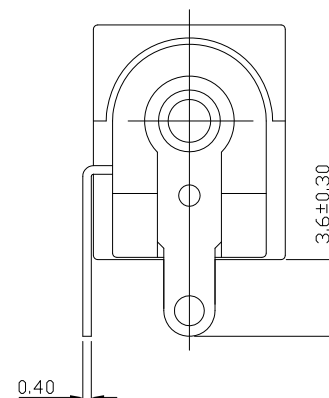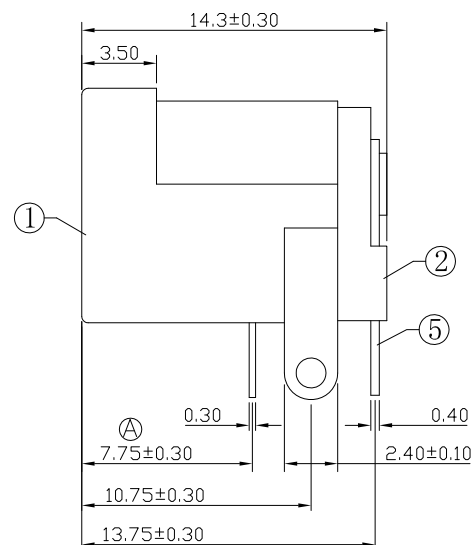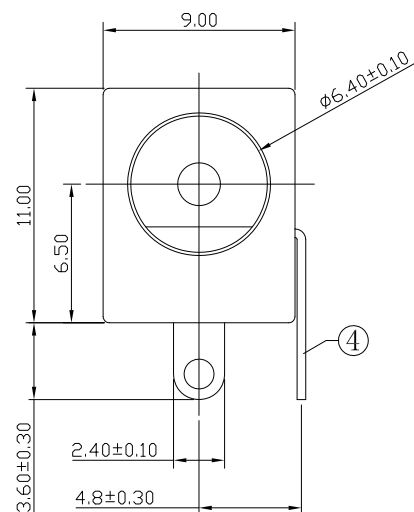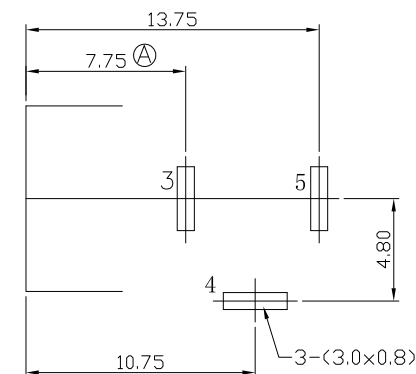
P.C.B LAYOUT
TOP VIEW

2

2

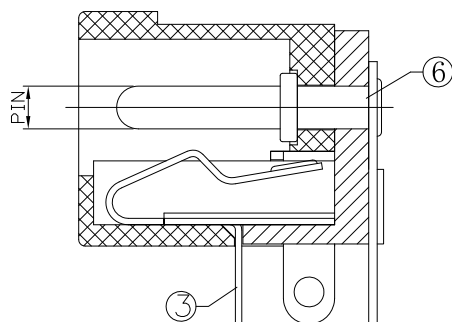

SCHEMATIC



Part No.	CDJ-D005-2.0	CDJ-D005-2.5
PIN	φ2.0	φ2.5



SPECIFICATION

- 1.Rating DC 12V 3.0A
- 2.Contact resistance ≤ 0.03
- 3.Insulation resistance $\geq 100M$ (DC250V)
- 4.Withstand voltage 500VAC
- 5.Insertion and extraction force 3-30N;
- 6.life test 5,000 cycles
- 7.Operating Temperature: $-20^{\circ}C \sim +70^{\circ}C$

6	PIN	1	BRASS	——	Ni-Plating
5	FLAT FOOT	1	BRASS	——	Sn-Plating
4	SPRING PIECE	1	BRASS	——	Sn-Plating
3	CURVE PIECE	1	BRONZE	——	Sn-Plating
2	SPRING	1	PA9T	——	——
1	HOUSING	1	PA9T	——	——
NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK

3



承洧科技股份有限公司
Chong Wei Technology Corp.

DESCRIPTION(内容):

DC Power JACK (14.3) 90°
(RoHS)

PART NO:
(料 號) CDJ-D005-XX

DWG NO(圖號): DJ-D005

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:
(公差)

.X ± 0.30
.XX ± 0.20

SCALE(比例):

FREE



REV:

R4

UNIT:

mm

SIZE:

A4

SHEET:

1/2

REV

R1

R2

R3

R4

DESCRIPTION

更正"Resistance" 單位

變更(A)尺寸(原:8.0)

新增Operating Temperature

DC描述修正

DATE

2014.03.24

2016.12.07

2017.05.16

2019.07.22

A



B

C


D

E

CFI165




PE 袋500pcs



小紙盒 (500pcs)=1 盒



12 盒



紙箱 (12X500=6000pcs) =1 箱
淨重: 11kg 毛重: 12kg



承洧科技股份有限公司
Chong Wei Technology Corp.

DESCRIPTION(內容):

DC Power JACK (14.3) 90°
(RoHS)

PART NO:
(料 號) CDJ-D005-XX

DWG NO(圖號): DJ-D005

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:
(公差)

SCALE(比例):

FREE



REV:
R0

UNIT:
mm

SIZE:
A4

SHEET:
2/2

REV

R0

R1

R2

R3

DESCRIPTION

DATE

2017.04.19